

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 691 397 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
06.10.2004 Bulletin 2004/41

(51) Int Cl.7: **C11D 3/00, C11D 3/20,**
C11D 1/835, C11D 1/94,
C11D 3/43

(21) Application number: **95304637.2**

(22) Date of filing: **03.07.1995**

(54) Antimicrobial hard surface cleaner

Antimikrobieller Reiniger für harte Oberflächen

Produit de nettoyage antimicrobien pour surface dure

(84) Designated Contracting States:
**AT BE CH DE DK ES FR GB GR IE IT LI LU MC NL
PT SE**

(30) Priority: **07.07.1994 US 271681**

(43) Date of publication of application:
10.01.1996 Bulletin 1996/02

(73) Proprietor: **The Clorox Company
Oakland California 94612 (US)**

(72) Inventors:
• Zhou, Boli
Antioch, CA 94509 (US)

• Stanislowski, Anna G.
Walnut Creek, CA 94595 (US)

(74) Representative: **Froud, Clive et al
Elkington and Fife LLP,
Prospect House
8 Pembroke Road
Sevenoaks, Kent TN13 1XR (GB)**

(56) References cited:
**EP-A- 0 621 335 EP-A- 0 651 048
WO-A-93/16162 GB-A- 1 459 806
GB-A- 2 075 043 US-A- 3 694 365
US-A- 4 540 505**

EP 0 691 397 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The invention relates to a non-rinse, isotropic, antimicrobial hard surface cleaner especially adapted to be used on glossy or smooth, hard surfaces, which removes soils deposited thereon and disinfects same, while significantly reducing the amount of residue caused by unremoved soil, cleaner, or a combination thereof.

[0002] Cleaning hard, glossy surfaces has proven to be problematic. To remove soils deposited on such surfaces, the typical approach is to use an alkaline ammonium-based aqueous cleaner or other aqueous cleaners containing various mixtures of surfactants and other cleaning additives. Unfortunately, many of the ammonia-based cleaners have fairly poor soil removing ability, while many of the surfactant-based cleaners leave fairly significant amounts of residue on such hard, glossy surfaces. This residue is seen in the phenomena of streaking, in which the soil, cleaner, or both are inconsistently wicked off the surface, and filming, in which a thin layer of the residue actually clings to the surface desired to be cleaned.

[0003] Additionally, quaternary ammonium based liquid hard surface cleaners are in common use, typically as bathroom cleaners. Certain quaternary ammonium compounds can be effective as antimicrobial agents in small dosages in these cleaners. However, these types of cleaners typically are not effective on glossy, hard surfaces because they tend to leave a visible residue.

[0004] Baker et al., U.S. Patent 4,690,779, demonstrated a hard surface cleaner having improved non-streaking/filming properties in which a combination of low molecular weight polymer (e.g., polyethylene glycol) and certain surfactants were combined.

[0005] Corn et al., EP 0393772 and EP 0428816, describe hard surface cleaners containing anionic surfactants with ammonium counterions, and additional adjuncts.

[0006] GB 2,160,887 describes a cleaning system in which a combination of nonionic and anionic surfactants (including an alkanolamine salt alkyl sulfate) is contended to enhance cleaning efficacy.

[0007] WO 91/11505 describes a glass cleaner containing zwitterionic surfactant, monoethanolamine and/or beta-aminoalkanols as solvents/buffers for assertedly improving cleaning and reducing filming spotting.

[0008] A series of patents to Flanagan (US 4,065,409, US 4,174,304, US 4,203,872 and US 4,264,304) describe dilutable cleaner concentrates which included quaternary ammonium surfactants. The compositions of these inventions do not claim improved filming/streaking properties.

[0009] Thus, the prior art hard surface cleaners fail to achieve the desired goals of reduced residue (streaking and/or filming) and antimicrobial action.

[0010] Reference may also be made to the following: EP-A-0621335 (document according to Article 54(3) EPC), which relates to an all purpose cleaning composition; GB-A-2,075,043, which relates to a surfactant system; US-A-4,540,505, which relates to a disinfectant spray cleaner containing glycol ethers; US-A-3,694,365, which relates to compositions for cleaning and sterilizing milk equipment; and WO 93/16162, which relates to a reduced residue hard surface cleaner.

[0011] The invention provides an aqueous, antimicrobial hard surface cleaner with significantly improved residue removal and substantially reduced filming/streaking, said cleaner comprising:

- (a) an effective amount of no more than 50 weight percent of the composition of a solvent selected from C₁-6 alkanol, C₃-24 alkylene glycol ether, and mixtures thereof;
- (b) an effective amount of amine oxide surfactant;
- (c) an effective amount of a quaternary ammonium surfactant;
- (d) an effective amount of 0.01-2 weight percent of the composition of alkali metal ethylene diamine tetraacetate builder; and
- (e) the remainder as substantially all water.

the ratio of (b):(d) being greater than 1:1

[0012] The invention further comprises a method of cleaning soils from hard surfaces by applying said inventive cleaner to said soil, and removing both from said surface, while disinfecting said surface.

[0013] It is therefore an object of this invention to improve soil removal from hard surfaces.

[0014] It is another object of this invention to disinfect hard surfaces while improving soil removal performance.

[0015] It is another object of this invention to reduce filming which results from a residue of cleaner, soil, or both remaining on the hard surface intended to be cleaned.

[0016] It is a further object of this invention to reduce streaking, which results from inconsistent removal of the cleaner, soil, or both, from the hard surface intended to be cleaned.

[0017] The invention is an improved cleaning, substantially non-streaking/filming, antimicrobial hard surface cleaner especially adapted to be used on glossy or smooth, hard surfaces. The cleaner benefits from the presence of a quaternary ammonium surfactant which contributes unexpectedly to both antimicrobial efficacy as well as to the complete

removal of soils and the cleaner from the surface being cleaned. The cleaner itself has the following ingredients:


- (a) an effective amount of no more than 50 weight percent of the composition of a solvent selected from C₁₋₆ alkanol, C₃₋₂₄ alkylene glycol ether, and mixtures thereof;
- 5 (b) an effective amount of amine oxide a surfactant;
- (c) an effective amount of a quaternary ammonium surfactant;
- (d) an effective amount of 0.01-2 weight percent of the composition of alkali metal ethylene diamine tetraacetate builder; and
- (e) the remainder as substantially all water.

10 [0018] Additional adjuncts in small amounts such as fragrance can be included to provide desirable attributes of such adjuncts.

[0019] In the application, effective amounts are generally those amounts listed as the ranges or levels of ingredients in the descriptions which follow hereto. Unless otherwise stated, amounts listed in percentage ("%"s") are in weight 15 percent of the composition, unless otherwise noted.


[0020] The solvent is selected from C₁₋₆ alkanol, C₃₋₂₄ alkylene glycol ether, and mixtures thereof. The alkanol can be selected from methanol, ethanol, n-propanol, isopropanol, butanol, pentanol, hexanol, their various positional isomers, and mixtures of the foregoing. In the invention, it has been found most preferable to use isopropanol, usually in conjunction with a glycol ether. It may also be possible to utilize in addition to, or in place of, said alkanols, the diols 20 such as methylene, ethylene, propylene and butylene glycols, and mixtures thereof.

[0021] It is preferred to use an alkylene glycol ether solvent in this invention. The alkylene glycol ether solvents can include ethylene glycol monobutyl ether, ethylene glycol monopropyl ether, propylene glycol n-propyl ether, propylene glycol monobutyl ether, dipropylene glycol methyl ether, and mixtures thereof. Two preferred glycol ethers are ethylene glycol monobutyl ether, also known as butoxyethanol, sold as butyl Cellosolve by Union Carbide, and propylene glycol n-propyl ether, available from a variety of sources.. Another preferred alkylene glycol ether is propylene glycol t-butyl 25 ether, which is commercially sold as Arcosolve PTB, by Arco Chemical Co. It has the structure:



30 [0022] Other suppliers of preferred solvents include Union Carbide. If mixtures of solvents are used, the amounts and ratios of such solvents used are important to determine the optimum cleaning and streak/film performances of the inventive cleaner. It is preferred to limit the total amount of solvent to no more than 50%, more preferably no more than 25%, and most preferably, no more than 15%, of the cleaner. A preferred range is about 1-15%

35 [0023] The invention requires an amine oxide surfactant, such as the trialkyl amino oxides. These have the general configuration:



40 wherein R is C₆₋₂₄ alkyl, and R' and R'' are both C₁₋₄ alkyl, although R' and R'' do not have to be equal. These amine oxides can also be ethoxylated or propoxylated. The preferred amine oxide is lauryl amine oxide, such as Barlox 12, from Lonza Chemical Company.


[0024] The present invention can comprise further surfactants selected from nonionic and amphoteric surfactants, 45 and mixtures thereof.

[0025] The nonionic surfactants are selected from alkoxylated alcohols, alkoxylated ether phenols. The alkoxylated alcohols include ethoxylated, and ethoxylated and propoxylated C₆₋₁₆ alcohols, with about 2-10 moles of ethylene oxide, or 1-10 and 1-10 moles of ethylene and propylene oxide per mole of alcohol, respectively. For the invention, a

mixture of nonionic and amine oxide surfactants are most preferred.

[0026] It has been surprisingly found that to obtain effective streaking/filming performance, the ratio of amine oxide: EDTA must be carefully controlled in the invention. The amount of amine oxide must exceed the amount of EDTA, more preferably exceeds 3:1 and most preferably is 4:1 or greater.

5 [0027] The amphoteric surfactant is typically an alkylbetaine or a sulfobetaine. Especially preferred are alkylamidoalkyldialkylbetalaines. These have the structure:

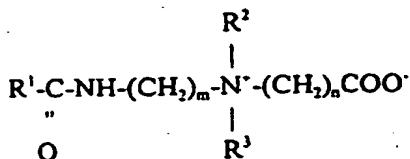

10 wherein R₁ is C₆₋₂₀ alkyl, R₂ and R₃ are both C₁₋₄ alkyl, although R₂ and R₃ do not have to be equal, and m can be 1-5, preferably 3, and n can be 1-5, preferably 1. These alkylbetalaines can also be ethoxylated or propoxylated. The preferred alkylbetaine is a cocoamidopropyltrimethyl betaine called Lonzaine CO, available from Lonza Chemical Co.

20 Other vendors are Henkel KGaA, which provides Velvetex AB, and Sherex Chemical Co., which offers Varion CADG, both of which products are cocobetaaines.

[0028] The amounts of surfactants present are to be somewhat minimized, for purposes of cost-savings and to generally restrict the dissolved actives which could contribute to leaving behind residues when the cleaner is applied to a surface. However, the amounts added are generally 0.001-5%, more preferably 0.002-2.00% surfactant.

25 [0029] The invention further requires a quaternary ammonium surfactant. These types of surfactants are typically used in bathroom cleaners because they are generally considered "broad spectrum" antimicrobial compounds, having efficacy against both gram positive (e.g., Staphylococcus sp.) and gram negative (e.g., Escherichia coli) microorganisms. However, it has been previously found that hard surface cleaners containing quaternary ammonium compounds typically leave residue and thus perform relatively poorly on glossy hard surfaces. Streaking/filming performance, as 30 can be expected, is uniformly poor. However, because of the unique formulations of the invention in which the ratio of amine oxide to EDTA is carefully controlled, the inventive compositions have surprisingly superior streaking/filming performance compared to other quaternary ammonium-based cleaning formulations.

35 [0030] The alkali metal ethylene diamine tetraacetate (EDTA) is an important aspect of the invention. As mentioned above, there appears to be an interaction between the amine oxide surfactant EDTA. EDTA is known as a chelant, as well. Buffers, such as ammonium, alkali metal and alkaline earth metal hydroxides, and such as ammonium carbamate, which has the structure NH₂COO⁻NH⁺₄, may also be desirable for inclusion. Other, potentially suitable buffers are alkoxyalkylamines, such as isopropoxyguanidine derivatives, such as diaminoguanidine and guanidine carbonate; alkoxyalkylamines, such as ethylene-propylamine, butoxypropylamine, ethoxypropylamine and methoxypropylamine; and alkylamines, such as ethylenediamine, ethylenetriamine, ethylenetetramine, diethylenetetramine, triethylenetetramine, tetraethylamine, enepentamine, N,N-dimethylethylenediamine, N-methylenediamine, and other variations of the alkyl and amine substituents.

40 [0031] The amount of EDTA added is in the range of 0.01-2%, more preferably 0.01-1%, by weight of the cleaner, while hydroxide, if present, should be added in the range of 0.001-1% by weight of the cleaner.

[0032] Since the cleaner is an aqueous cleaner with relatively low levels of actives, the principal ingredient is water, which should be present at a level of at least about 50%, more preferably at least about 80%, and most preferably, at least about 90%. Deionized water is most preferred.

45 [0033] Small amounts of adjuncts can be added for improving cleaning performance or aesthetic qualities of the cleaner. Adjuncts for cleaning include additional surfactants, such as those described in Kirk-Othmer, Encyclopedia of Chemical Technology, 3rd Ed., Volume 22, pp. 332-432 (Marcel-Dekker, 1983). Aesthetic adjuncts include fragrances, such as those available from Givaudan, IFF, Quest and others, and dyes and pigments which can be solubilized or suspended in the formulation, such as diaminoanthraquinones. The amounts of these cleaning and aesthetic adjuncts should be in the range of 0-2%, more preferably 0-1%.

50 [0034] In the following Experimental section, the surprising performance benefits of the various aspects of the inventive cleaner are demonstrated.

55

EXPERIMENTAL

[0035] Two formulations, the first being inventive, the second being a comparative example, are set forth below as

EP 0 691 397 B1

Examples 1-2.

Example 1	
Ingredient	Wt. %
Quaternary ammonium surfactant ¹	0.6
NaOH	0.2
Nonionic surfactant ²	0.25
Amine oxide surfactant ³	2.2
Solvent ⁴	3.0
Na ₄ EDTA ⁵	0.56
D.I. H ₂ O	Q.S. ⁶

¹ Barquat MB-50, C₁₄ alkylbenzylidimethylammonium chloride (50% solution). In all of the following examples, if the same ingredient is listed and identified, the identification provided hereunder will be relied upon.

² Alfonic 610-50, C₆-10 ethoxylated alcohol, about 3 moles of ethylene oxide per mole of alcohol (50% solution)

³ Barlox 12, C₁₂ alkyl dimethylamine oxide, from Lonza Inc., (30% solution)

⁴ Ethylene glycol, monobutyl ether

⁵ Builder, sodium ethylenediaminetetraacetate, 38% solution

⁶ quantity sufficient to make up 100% formulation

Comparative Example 2	
Ingredient	Wt. %
Quaternary ammonium surfactant	0.6
NaOH	0.2
Nonionic surfactant	0.25
Amine oxide surfactant	0.25
Solvent	2.0
Na ₄ EDTA	0.39
D.I. H ₂ O	Q.S.

¹ Unless further identified, all of the ingredients are the same as in the prior Example.

[0036] The two formulations 1 and 2 were compared against one another and against a number of commercially available cleaners for filming/streaking performance on glass mirror tiles. A grading scale of 0 to 10 was used, with 0 being worst and 10 being best. The results are tabulated below:

Table I

Filming/Streaking Performance				
Example/Product	1	2	Lysol ¹	Formula 409® ²
S/F Performance	7.7	2.3	3.9	8.3
Example/Product	Commercial Product 1	Commercial Product 2	Commercial Product 3	Commercial Product 4
S/F Performance	9.4	2.1	2	3.1

¹ L&F Products, Antibacterial Kitchen Cleaner, hard surface cleaner.

² The Clorox Company, hard surface cleaner.

[0037] As can be seen from the foregoing data, Example 1, which had the preferred >3:1 ratio of amine oxide: EDTA, clearly outperformed Example 2, as well as the commercial product Lysol Antibacterial Kitchen Cleaner, as well as commercial products 2-4, all of which are bactericidal products. Additionally, its streaking/filming performance was comparable to that of Formula 409® all purpose cleaner and commercial product 1, both of which are hard surface cleaners without bactericides.

[0038] Further examples of the invention are demonstrated in Examples 4-10 below:

Ingredient	Example 3	Example 4	Example 5	
NaOH	0.2%	0.2%	0.2%	
Quat. ¹	0.6%	0.6%	0.6%	
Nonionic ²	0.25%	0.25%	0.25%	
Solvent ³	2.0%	2.0%	2.0%	
EDTA	0.5%	1.5%	0.5%	
Amine Ox. ⁴	2.0%	6.0%	4.0%	
D.I. H ₂ O	Q.S.	Q.S.	Q.S.	
Ingredient	Example 6	Example 7	Example 8	Example 9
NaOH	0.2%	0.2%	0.2%	0.2%
Quat. ¹	0.6%	0.6%	0.6%	0.4%
Nonionic ⁵	0.25%	0.36%	0.36%	0.36%
Solvent ³	2.0%	3.0%	2.0%	3.0%
EDTA	0.5%	0.5%	0.5%	0.5%
Amine Ox. ⁴	2.0%	2.0%	2.0%	2.0%
D.I. H ₂ O	Q.S.	Q.S.	Q.S.	Q.S.

¹Quaternary ammonium compound, Barquat MB-50
² Nonionic surfactant, Surfonic N-100, ethoxylated C₉alkylphenol, 10 moles of ethylene oxide, from Texaco Chemical.
³ Ethylene glycol, monobutyl ether.
⁴ C12 alkyl dimethylamine oxide (30%).
⁵ Quantify sufficient to make up 100% solution.
⁶ Nonionic surfactant, Alfonic 610-50.

Table II

Filming/Streaking Performance			
Example	3	4	5
S/F Performance	7.5	6.7	7.3
Example	6	7	
S/F Performance	7.9	7.7	

[0039] As can be seen from the above Table II, inventive Examples 3-7, streaking/filming performance was excellent for these formulations. Examples 8-9, although ungraded by test panelists, were comparable to 3-7 by visual observation.

[0040] Further, in Table III below, the antimicrobial properties of certain of the inventive formulations were demonstrated. In these examples, ASTM Standard Test Method E1 135-87 (1987), "Efficacy of Sanitizers Recommended for Inanimate Non-Food Contact Surfaces," was modified for use with the inventive formulations as the sanitizer solutions. As can be seen from the collected data, the inventive formulations possess excellent antimicrobial efficacy. Although not all formulations were tested, they would be expected to have similar efficacies.

Table III

Antimicrobial Efficacy after 1 Minute Contact with Formulations					
	Bacterium	Example	1	5	6
5	Staph. aureus	% reduction	≥ 99.99%	≥ 99.99%	(not conducted)
	Enterobacter aerogenes	■ ■	≥ 99.99%	(not conducted)	≥ 99.99%
10		Example	7	9	
	Staph. aureus	■ ■	≥ 99.99%	≥ 99.99%	
	Klebsiella pneumoniae	■ ■	≥ 99.99%	≥ 99.99%	

15 Claims

1. An aqueous, antimicrobial hard surface cleaner with significantly improved residue removal and substantially reduced filming/streaking, **characterised in that** it comprises:
 - (a) an effective amount of no more than 50 weight percent of the composition of a solvent selected from C₁₋₆ alkanol, C₃₋₂₄ alkylene glycol ether, and mixtures thereof;
 - (b) an effective amount of amine oxide surfactant;
 - (c) an effective amount of quaternary ammonium surfactant;
 - (d) an effective amount of 0.01-2 weight percent of the composition of alkali metal ethylene diamine tetraacetate builder;
 - and
 - (e) the remainder as substantially all water; the ratio of (b):(d) being greater than 1:1.
2. A hard surface cleaner as claimed in claim 1 wherein the said solvent is an alkylene glycol ether which is selected from ethylene glycol monobutyl ether, ethylene glycol monopropyl ether, propylene glycol monopropyl ether, propylene glycol monobutyl ether, and mixtures thereof.
3. A hard surface cleaner as claimed in claim 1 wherein it further comprises a nonionic surfactant other than the amine oxide.
4. A hard surface cleaner as claimed in claim 3 wherein the said nonionic surfactant is an ethoxylated alcohol.
5. A hard surface cleaner as claimed in claim 1 wherein the ratio of (b):(d) is greater than 3:1.
6. A hard surface cleaner as claimed in claim 1 wherein the ratio of (b):(d) is greater than 4:1.
7. A method of cleaning soil, without substantial residue remaining, from a hard surface **characterised in that** it comprises applying a cleaner as claimed in any of claims 1 to 6 to the said soil and removing the said soil and the said cleaner.

45

Patentansprüche

1. Wässriger antimikrobieller Oberflächenreiniger mit signifikant verbesselter Rückstandsentfernung und erheblich reduzierter Film-/Streifenbildung, **dadurch gekennzeichnet, dass** er umfasst:
 - (a) eine wirksame Menge von nicht mehr als 50 Gew.-% der Zusammensetzung eines Lösungsmittels ausgewählt aus C₁₋₆-Alkanol, C₃₋₂₄-Alkyenglykolether und Gemischen davon;
 - (b) eine wirksame Menge eines Aminoxid-Tensids;
 - (c) eine wirksame Menge eines quaternären Ammoniumtensids;
 - (d) eine wirksame Menge von 0,01-2 Gew.-% der Zusammensetzung eines Alkalimetallethylen diamintetraacetat-Builders; und
 - (e) zum Rest im Wesentlichen Wasser;

wobei das Verhältnis von (b):(d) größer als 1:1 ist.

2. Oberflächenreiniger nach Anspruch 1, worin das Lösungsmittel ein Alkylenglykolether ist, der aus Ethylen glykol-monobutylether, Ethylen glykolmonopropylether, Propylenglykolmonopropylether, Propylenglykolmonobutylether und Gemischen davon ausgewählt ist.
5
3. Oberflächenreiniger nach Anspruch 1, der weiterhin ein von dem Amminoxid verschiedenes nicht-ionisches Tensid umfasst.
- 10 4. Oberflächenreiniger nach Anspruch 3, worin das nichtionische Tensid ein ethoxylierter Alkohol ist.
5. Oberflächenreiniger nach Anspruch 1, worin das Verhältnis von (b):(d) größer als 3:1 ist.
- 15 6. Oberflächenreiniger nach Anspruch 1, worin das Verhältnis von (b):(d) größer als 4:1 ist.
7. Verfahren zur im Wesentlichen rückstandsfreien Entfernung von Schmutz von einer harten bzw. festen Oberfläche, dadurch gekennzeichnet, dass man einen Reiniger nach den Ansprüchen 1 bis 6 auf den Schmutz einwirken lässt und den Schmutz und den Reiniger entfernt.

20

Revendications

1. Produit de nettoyage antimicrobien aqueux pour surface dure avec une élimination des résidus significativement améliorée et une formation de voile / de traînées considérablement réduite, caractérisé en ce qu'il comprend :
25 (a) une quantité efficace pas supérieure à 50 pour cent en poids de la composition d'un solvant choisi parmi un alcool en C₁₋₆, un éther d'alkylène en C₃₋₂₄ glycol, et les mélanges de ceux-ci ;
(b) une quantité efficace d'un agent tensioactif oxyde d'amine ;
(c) une quantité efficace d'un agent tensioactif ammonium quaternaire ;
30 (d) une quantité efficace de 0,01 à 2 pour cent en poids de la composition d'un adjuvant tétraacétate d'éthylène diamine d'un métal alcalin ;
et
(e) le reste essentiellement sous forme d'eau ;
35 le rapport de (b):(d) étant supérieur à 1:1.
2. Produit de nettoyage pour surface dure selon la revendication 1, dans lequel ledit solvant est un éther d'alkylène glycol qui est choisi parmi l'éther monobutylique d'éthylène glycol, l'éther monopropylique d'éthylène glycol, l'éther monopropylique de propylène glycol, l'éther monobutylique de propylène glycol, et les mélanges de ceux-ci.
- 40 3. Produit de nettoyage pour surface dure selon la revendication 1, dans lequel il comprend en outre un agent tensioactif non ionique autre que l'oxyde d'amine.
4. Produit de nettoyage pour surface dure selon la revendication 3, dans lequel ledit agent tensioactif non ionique est un alcool éthoxylé.
- 45 5. Produit de nettoyage pour surface dure selon la revendication 1, dans lequel le rapport de (b):(d) est supérieur à 3:1.
6. Produit de nettoyage pour surface dure selon la revendication 1, dans lequel le rapport de (b):(d) est supérieur à 4:1.
- 50 7. Procédé de nettoyage d'une salissure, sans résidu considérable restant, à partir d'une surface dure, caractérisé en ce qu'il comprend l'application d'un produit de nettoyage selon l'une quelconque des revendications 1 à 6 à ladite salissure et l'élimination de ladite salissure et dudit produit de nettoyage.

55